




GEARZE

Delivering the correct transmission every time..

TR SERIES

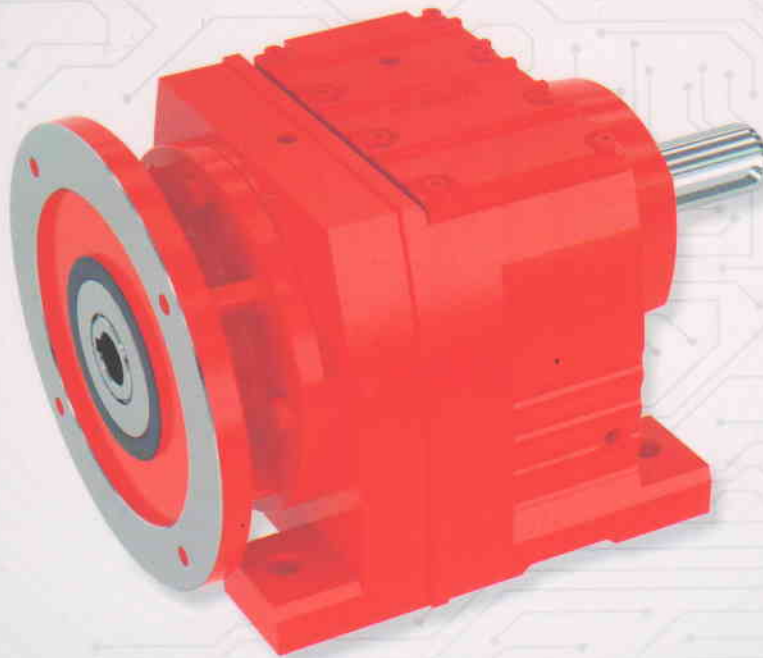

TR Series

www.gearlinc.co.in

Gear Unit Specifications

Input power rating and maximum torque

Size	18	28	38	48	58	68	78	88	98	108	138	148	168
Structure	TR TRF												
Input power rating (kw)	0.18-0.75	0.18-3.0	0.18-3.0	0.18-5.5	0.18-7.5	0.18-7.5	0.18-11.0	0.18-22.0	0.18-0.75	0.18-45.0	0.18-55.0	0.18-90.0	0.18-160.0
Ratio	3.83-74.84	3.37-135.09	3.41-134.82	3.83-176.88	4.39-186.89	4.29-199.81	5.21-195.24	5.36-246.54	4.49-289.60	5.06-245.5	5.15-223.34	5.00-163.46	8.77-196.41
Maximum torque	85	130	200	300	450	600	820	1550	3000	4300	8000	13000	18000

Gear unit weight




Size	TR18	TR28	TR38	TR48	TR58	TR68	TR78	TR88	TR98	TR108	TR138	TR148	TR168
Weight	4	5.5	8.5	10	18	25	36	63	101	153	220	400	700
Unit Type	TRX38	TRX58	TRX68	TRX78	TRX88	TRX98	TRX108	TRX128	TRX158				
Weight	5	8	14	23	39	70	100	150	250				

The weights are mean values, only for references.

M: +91 96876 10381/+91 99099 10387/+91 90998 05138 T: +91 79 2970 1965

E: sales@gearlinc.co.in W: www.gearlinc.co.in

Mounting Position

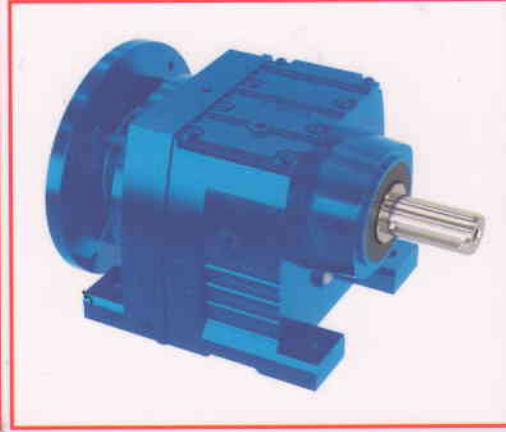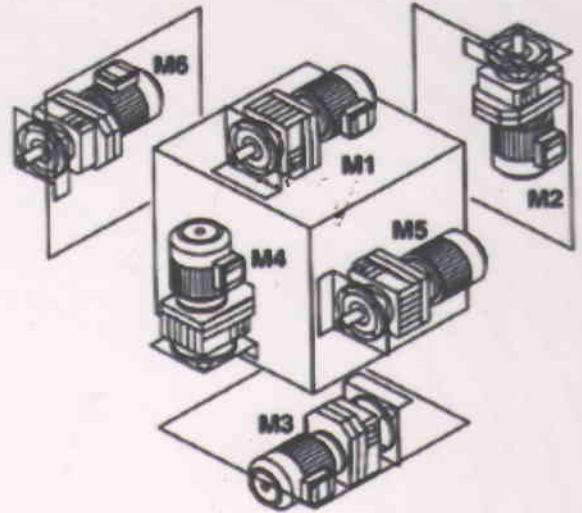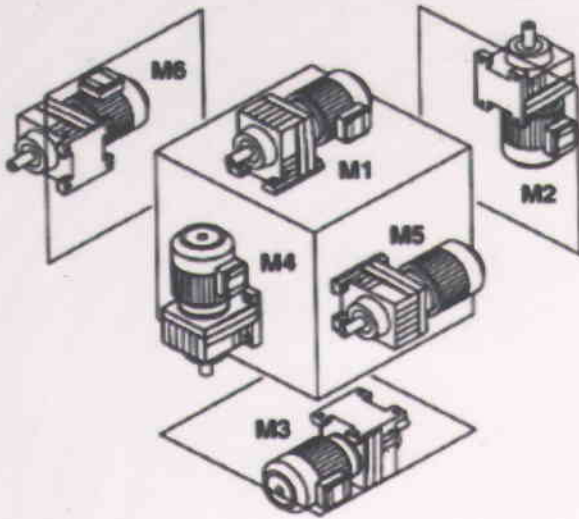

GEARLINC SYSTEMS : B - 305, Solitalre, Nr. Divya Bhaskar Press, S.G.Highway, Ahmedabad - 380051. Gujarat, India.

M: +91 96876 10381/+91 99099 10387/+91 90998 05138 T: +91 79 2970 1965
E: sales@gearlinc.co.in W: www.gearlinc.co.in